




X Panel series

The new straight video display solution for Events & Ads



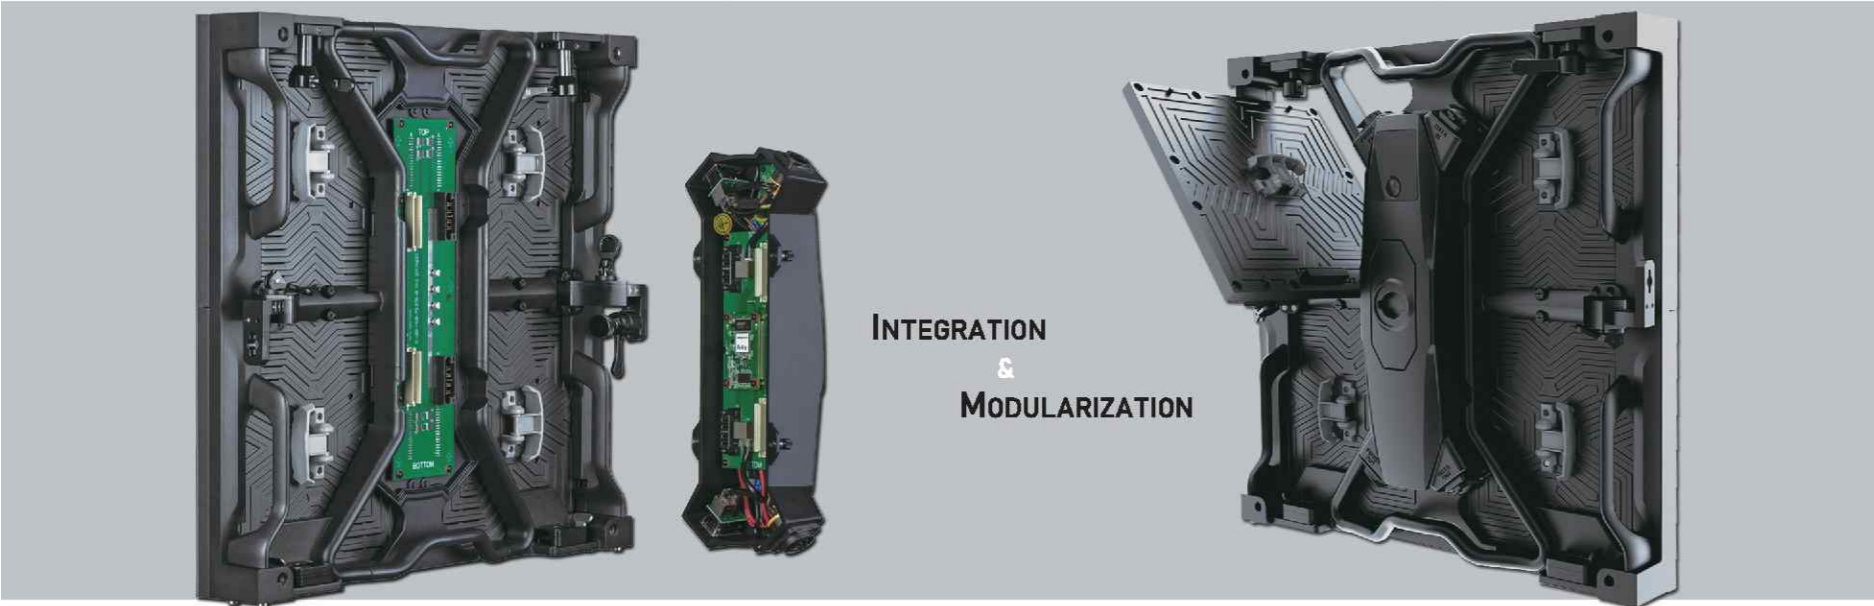

Highly integrated design

The power supply and control card are integrated in the system box, for more stable performance.

Advanced modular design

The module, system box and panel frame are all independent, between which the wireless connection is for convenient and rapid maintenance.

The panel structure (die-cast aluminum) is very strong and sturdy, giving a better handfeel and having better durability.

Model	X2.9	X3.9	XO3.9	XO4.8
Pixel pitch	2.97mm	3.91mm	3.91mm	4.81mm
LED lamp	SMD2020/2121	SMD2020/2121	SMD1921	SMD1921
Operating environment	indoor		outdoor	
Module size(mm)	L250 x W250			
Panel size(mm)	L500 x W500 x T94			
Panel weight(kg)	7.5	7.3	7.8	7.6
Viewing angle(°)	140			
Pixel density(dot/sq.m)	112,896	65,536	65,536	43,264
Scan mode	1/21	1/16	1/16	1/13
Brightness(cd/sq.m)	1200		3500/5000	
Refresh rate(Hz)	3840			
Gray scale(bit)	14/16			
Contrast	5000:1		4000:1	
Protection level	IP40		IP65	
Power consumption(W/sq.m)	600/200(Max./Ave.)			
Power input	100~240VAC/50~60Hz			
Operating temp./humidity(°C/RH)	-40~+60/10~90%			
Maintenance	Front/Rear			

