





Trans-eyes series

Trans-eyes can be adorned in various scenes such as airports, retail stores, shopping malls, and exhibitions. Key features include ultra-thin, lightweight, high transparency, easy setup and maintenance, front and rear service, and customized panel sizes.


**More than 60% transparency
amazing visual effect**

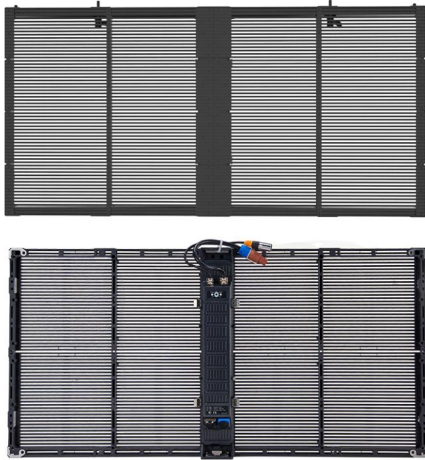


**Modular design
easy maintenance**

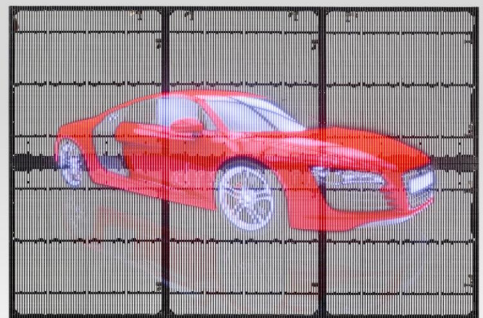

IP65 waterproof

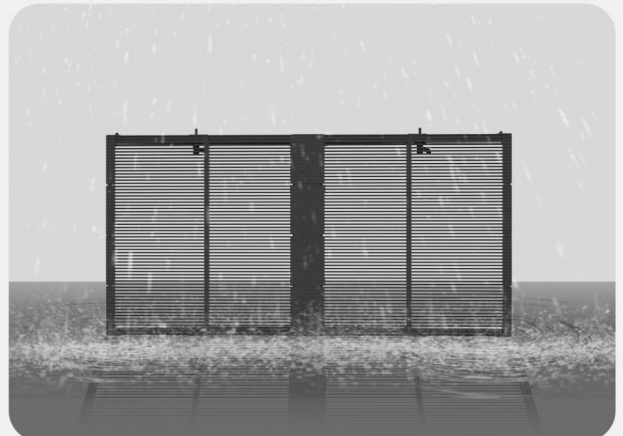

Suitable for various scenes, extraordinary visuals

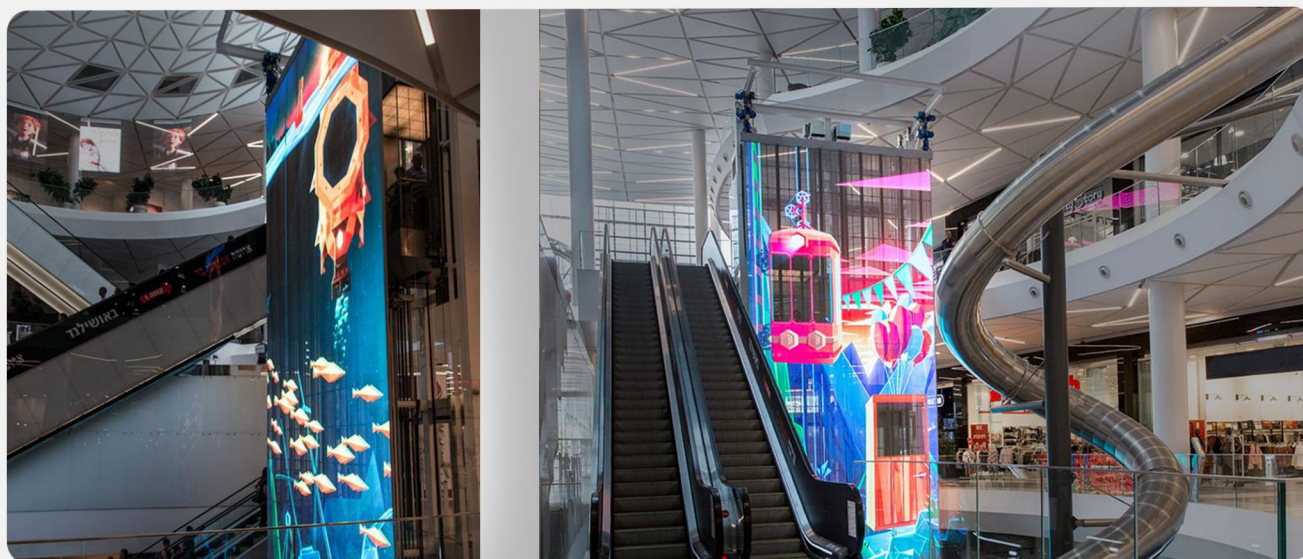

Specilfication

Model	TS-3	TS-6	TS-10
Pixel pitch (mm)	X:3.9/Y:7.8	X:6.94/Y:10.42	X:10.42/Y:10.42
Pixel density (pixel/m ²)	32,768	13,824	9,216
LED type	RGB 3-IN-1 SMD LED		
Brightness white (nits)	1,500/3,500	1,500/4,500	1,500/4,500
Optimal visual distance (m)	5	8	12
Transparency	60%	70%	70%
Recommend size (W×H)	1000×500		
Size can be customized (mm)			
Max power consumption (W/m ²)	300/600	330/680	330/680
Average power consumption (W/m ²)	100/200	110/225	110/225
Weight (kg/panel)	5	5	5
Power input	100V ~ 240VAC, 50/60Hz		
Gray scale (bit)	13		
Refresh rate (Hz)	3,840Hz		
View angle	Horizontal:140°; Vertical:140°		
Drive mode	1 / 8	1 / 4	1 / 3
Signal input	AV, S-Video, VGA, CVBS, HDMI, DVI, etc.		
Body material	Aluminium		
IP rating	IP 20		
Operating temp./humidity	-40℃ ~ +60℃/10%-90% RH		
Installation	Hanging/Stacking		
Package	Wooden case/Flight case		
Certifications	CE, FCC, RoHS		